

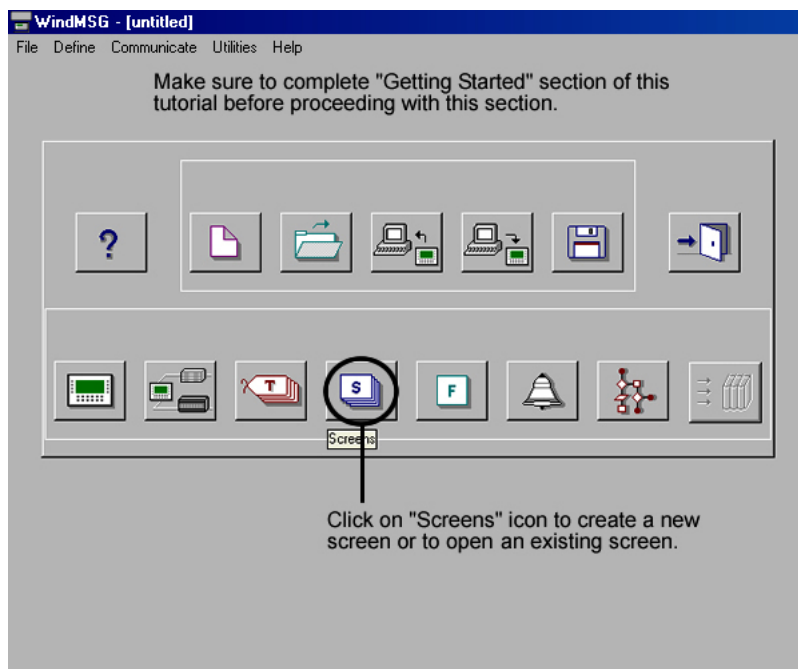




WindMSG Tutorial #3 (Reading a Bit Status)



WINDMSG TUTORIAL PART- 3


READING A BIT STATUS

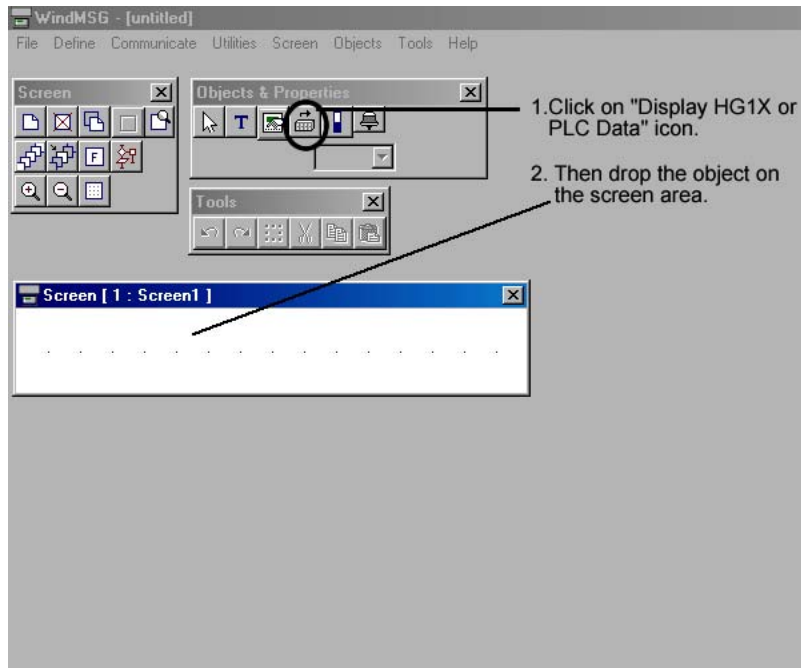

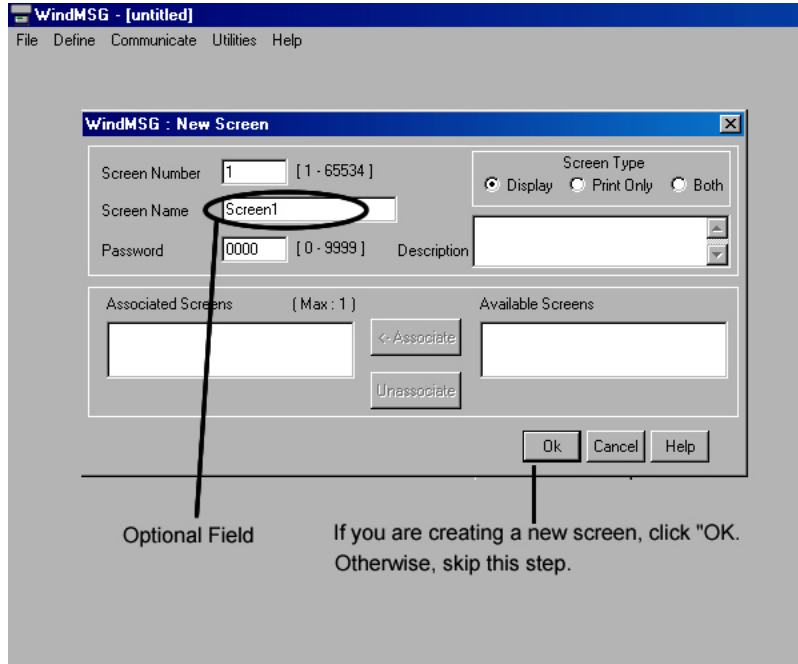

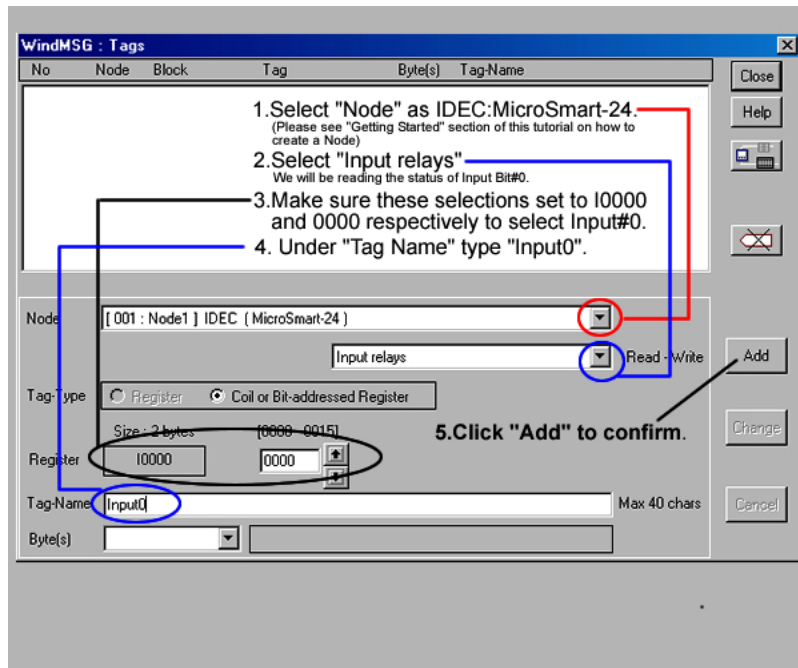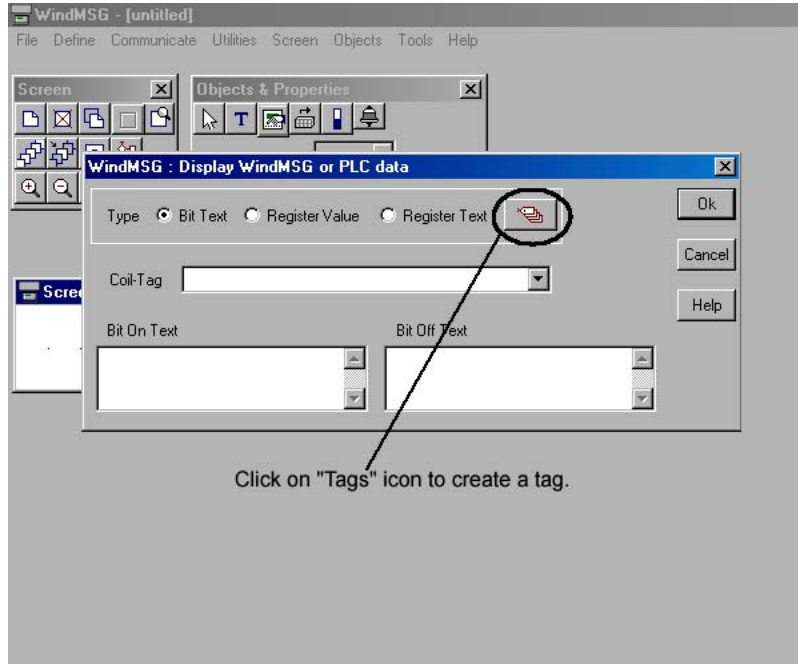

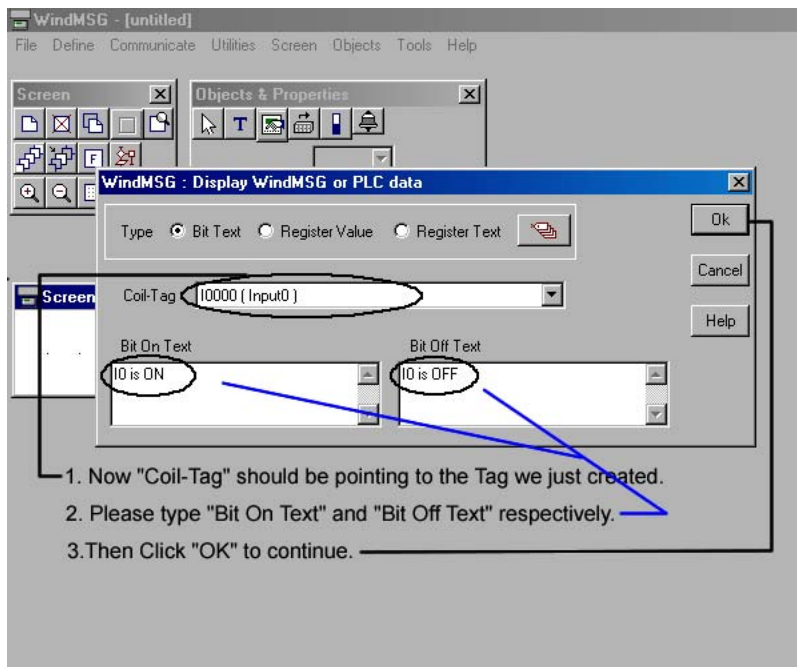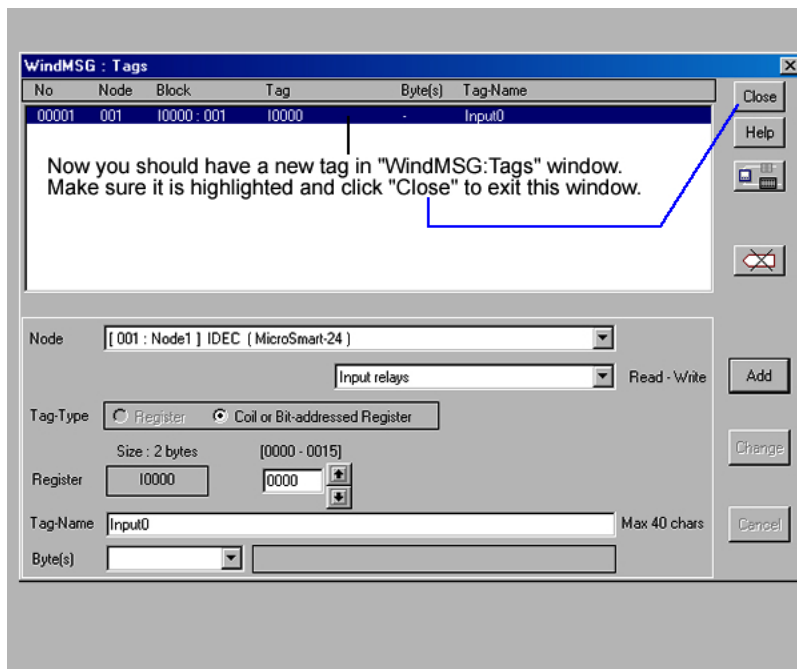

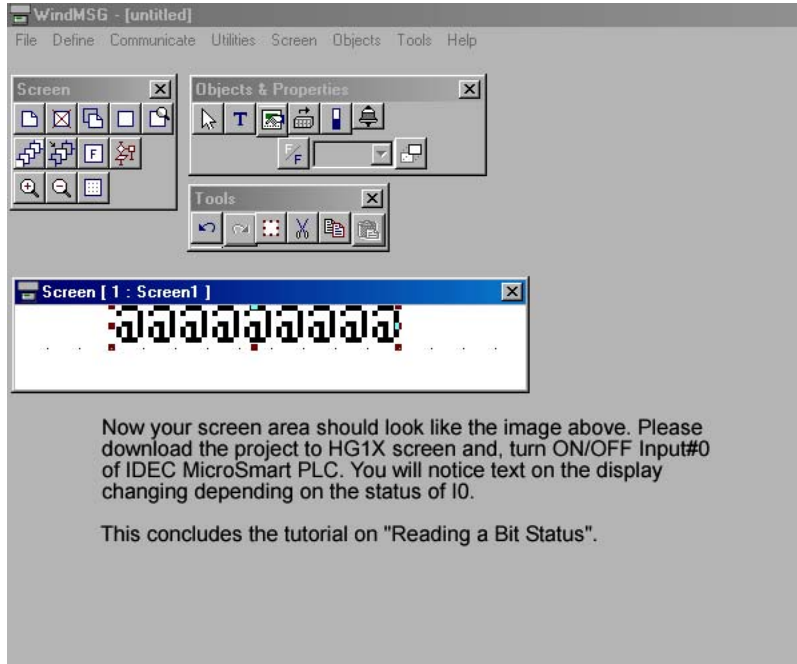

Now your screen area should look like the image above. Please download the project to HG1X screen and, turn ON/OFF Input#0 of IDEC MicroSmart PLC. You will notice text on the display changing depending on the status of I0.

This concludes the tutorial on "Reading a Bit Status".